


EXTERNAL ENTRANCE DOORS

Elegance in harmony with nature...

DZ 18 Paris.
Pinewood,
transparent teak colour

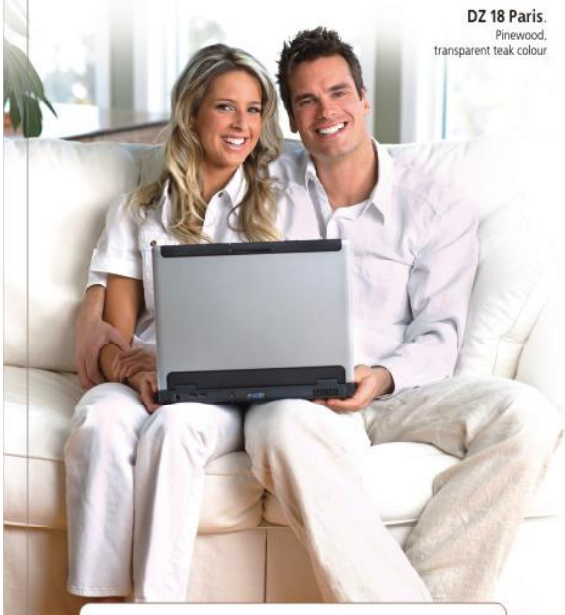

RELIABLE WORKMANSHIP
GUARANTEES SAFETY



Manufacturing options of external entrance doors

Class A



Class B



MATERIAL

Pine, meranti or oakwood.

External entrance doors are manufactured in the improved burglar proof option class A and class B (double panel doors are manufactured only in class A)

DESIGN

Timber laminated with a high humidity and temperature resistant glue. Door leaf and jamb - 68mm thick, wooden panels (both class A and B) - 56 mm thick.

For class B and class A of 56 mm thickness

FINISHING

Four-coating system: impregnation in a separate process and triple varnishing with a water borne covering or transparent varnishes in accordance with the sample-card from page 24

STANDARD EQUIPMENT

class A:

fittings: cylinder mortice lock, upper latch lock with an insert, single anti-lift bolt on a hinge side, three hinges without covering caps; safety glazing set O2 (33.1/14/4) of limited visibility (reflexive brown - antisol), aluminium threshold (55 mm high)

class B:

burglar proof fittings, bar of 10 anti-lift bolts on a hinge side, 10 bolts and a multi-point latch with cylinder mortice lock, three hinges with flat covering caps, burglar proof glass P4 (44.4/10/4) of limited visibility (reflexive brown - antisol), aluminium threshold (of 55 mm height)

EQUIPMENT AVAILABLE IN SURCHARGE

for class B: a top lock blockade;

for class A and B: handles, cylinder locks, rosettes, baroque covering caps, electromagnet, latch with roller-bolt lock, self-closer, low threshold, other type of glazing

Available options:

- single or double panel door
- with top or side lites
- inward or outward opening
- with an aluminium low threshold - 22mm high

Additional informations:

Technical Approval:
AT/06-0271/2005

National Conformity Declaration:
No. 05/2008

Conformity Certificate:
ITB-1308/W

Hygiene Certificate:
HK/B/2218/01/99

Warranty period:
2 years

EXTERNAL ENTRANCE DOORS

Elegance in harmony with nature...

DZ 3 Nice



DZ 4 Hamburg



DZ 5 Dublin



DZ 7 Majorca



DZ 8 Toulouse



DZ 9 Valencia



DZ 10 Rome



DZ 11 Turin



EXTERNAL ENTRANCE DOORS

Elegance in harmony with nature...

DZ 12 Milan



DZ 13 Madrid



DZ 16 Modena



DZ 17 Padua



DZ 18 Paris



DZ 19 Vienna



DZ 20 Athens



DZ 21 Bologna



EXTERNAL ENTRANCE DOORS

Elegance in harmony with nature...

DZ 22 Verona



DZ 23 Ankara



DZ 24 Porto




DZ 25 London




Standard dimensions of the doors: 980x2100mm, 980x2175mm, 1080x2100mm and 1080x2175mm.

On a Customer's request we can manufacture EXTERNAL DOORS of characteristics different than given above (different measurements, double panel, top and side lites)...

Exemplary vertical section

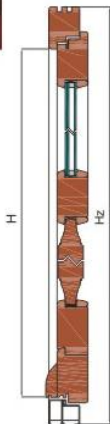

Exemplary cross-section

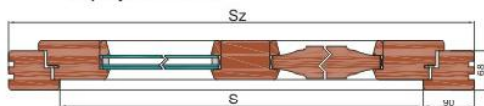

Types	External measurement of single panel door		Single panel door measurement in the light of the door frame		External measurement of double panel door		Double panel door measurement in the light of the door frame	
	Width Sz	Height H z	Width S	Height H	Width Sz	Height Hz	Width S	Height H
DZ 3 NICE, DZ 4 HAMBURG, DZ 5 DUBLIN, DZ 7 MAJORCA, DZ 8 TOULOUSE, DZ 9 VALENCIA, DZ 10 ROME, DZ 11 TURIN, DZ 12 MILAN, DZ 13 MADRID, DZ 16 MODENA, DZ 17 PADUA, DZ 18 PARIS, DZ 19 VIENNA, DZ 20 ATHENS, DZ 21 BOLOGNA, DZ 22 VERONA, DZ 23 ANKARA, DZ 24 PORTO, DZ 25 LONDON	980	2100 / 2175	800	1955/2030	1480	2100/2175	1300	1955/2030
	1080	2100 / 2175	900	1955/2030	1580	2100/2175	1400	1955/2030

It is advisable to make a hole in the wall bigger than the external door by 10 + 20 mm on each side. Individual possibilities of manufacturing a selected model based on prior agreement with the Customer's Service Dept.

EXTERIOR ENTRANCE DOORS DOUBLE PANEL

Elegance in harmony with nature...

DZ 3 Nice



DZ 4 Hamburg



DZ 5 Dublin



DZ 7 Majorca



DZ 8 Toulouse



DZ 9 Valencia



DZ 10 Roma



DZ 11 Turin




DZ 12 Milan



DZ 13 Madrid



DZ 16 Modena



DZ 17 Padua



EXTERNAL ENTRANCE DOORS DOUBLE PANEL

Elegance in harmony with nature...

DZ 18 Paris



DZ 19 Vienna



DZ 20 Athens



DZ 21 Bologna



DZ 22 Verona




DZ 23 Ankara



DZ 24 Porto



DZ 25 London



Standard dimensions of the double panel exterior doors: 1480x2100mm, 1480x2175mm, 1580x2100 and 1580x2175mm

class A version I includes:

- fittings: cylinder mortice lock,
- upper latch lock with an insert,
- single anti-lift bolt on a hinge side,
- six hinges without covering caps,
- limited visibility safety glass O2 (33.1/14/4 reflexive brown - antisol) visibility (brown antisol),
- aluminum threshold (55 mm high)

class A version II includes:

- fittings: burglary proof fittings, bar of 10 anti-lift bolts,
- multipoint latch with cylinder mortice lock,
- six hinges with flat covering caps,
- limited visibility, burglary proof glass set P4(44.4/10/4 reflexive brown)
- aluminum threshold (55 mm high)





EFFECT

CE

Elegance in harmony with nature...

Effect 1
Wood: laminated pine,
colour: transparent Afromosia



CLASSY ENTRANCE

Effect 1



Effect 2



Effect 3



Colour: transparent Afromosia
Opening: outwards

Other colours in accordance with the sample-card from page 24

MATERIAL

wood: lengthwise laminated pine

DESIGN

laminated timber glued with a high humidity and resistant glue,
leaf thickness - 55 mm, frame thickness - 55 mm and wooden panels - 43 mm thick

MEASUREMENTS

External door measurement: 1010 x 2100 mm, measurement in the light of the frame
900 x 2005 mm

FINISHING

four-coating system: impregnation in a separate process and triple varnishing with
a water borne covering or transparent paint in accordance with the sample-card
(page 24).

STANDARD EQUIPMENT

fittings: cylinder mortice lock, upper cylinder latch lock,
interlocking door bolt, three hinges without covering caps; limited visibility safety glass
O2 (33.1/14/4 reflexive brown - antisol) visibility (brown antisol), wooden threshold

EQUIPMENT AVAILABLE IN SURCHARGE

handles
cylinder locks 35/45
rosettes
covering caps

Available options:

- single panel version
- opened outwards

Additional Informations:

Conformity Declaration:
EC No 10/2008

Examination Certificate:
No 746/B-2008

Warranty period:
2 years